

Figure 1

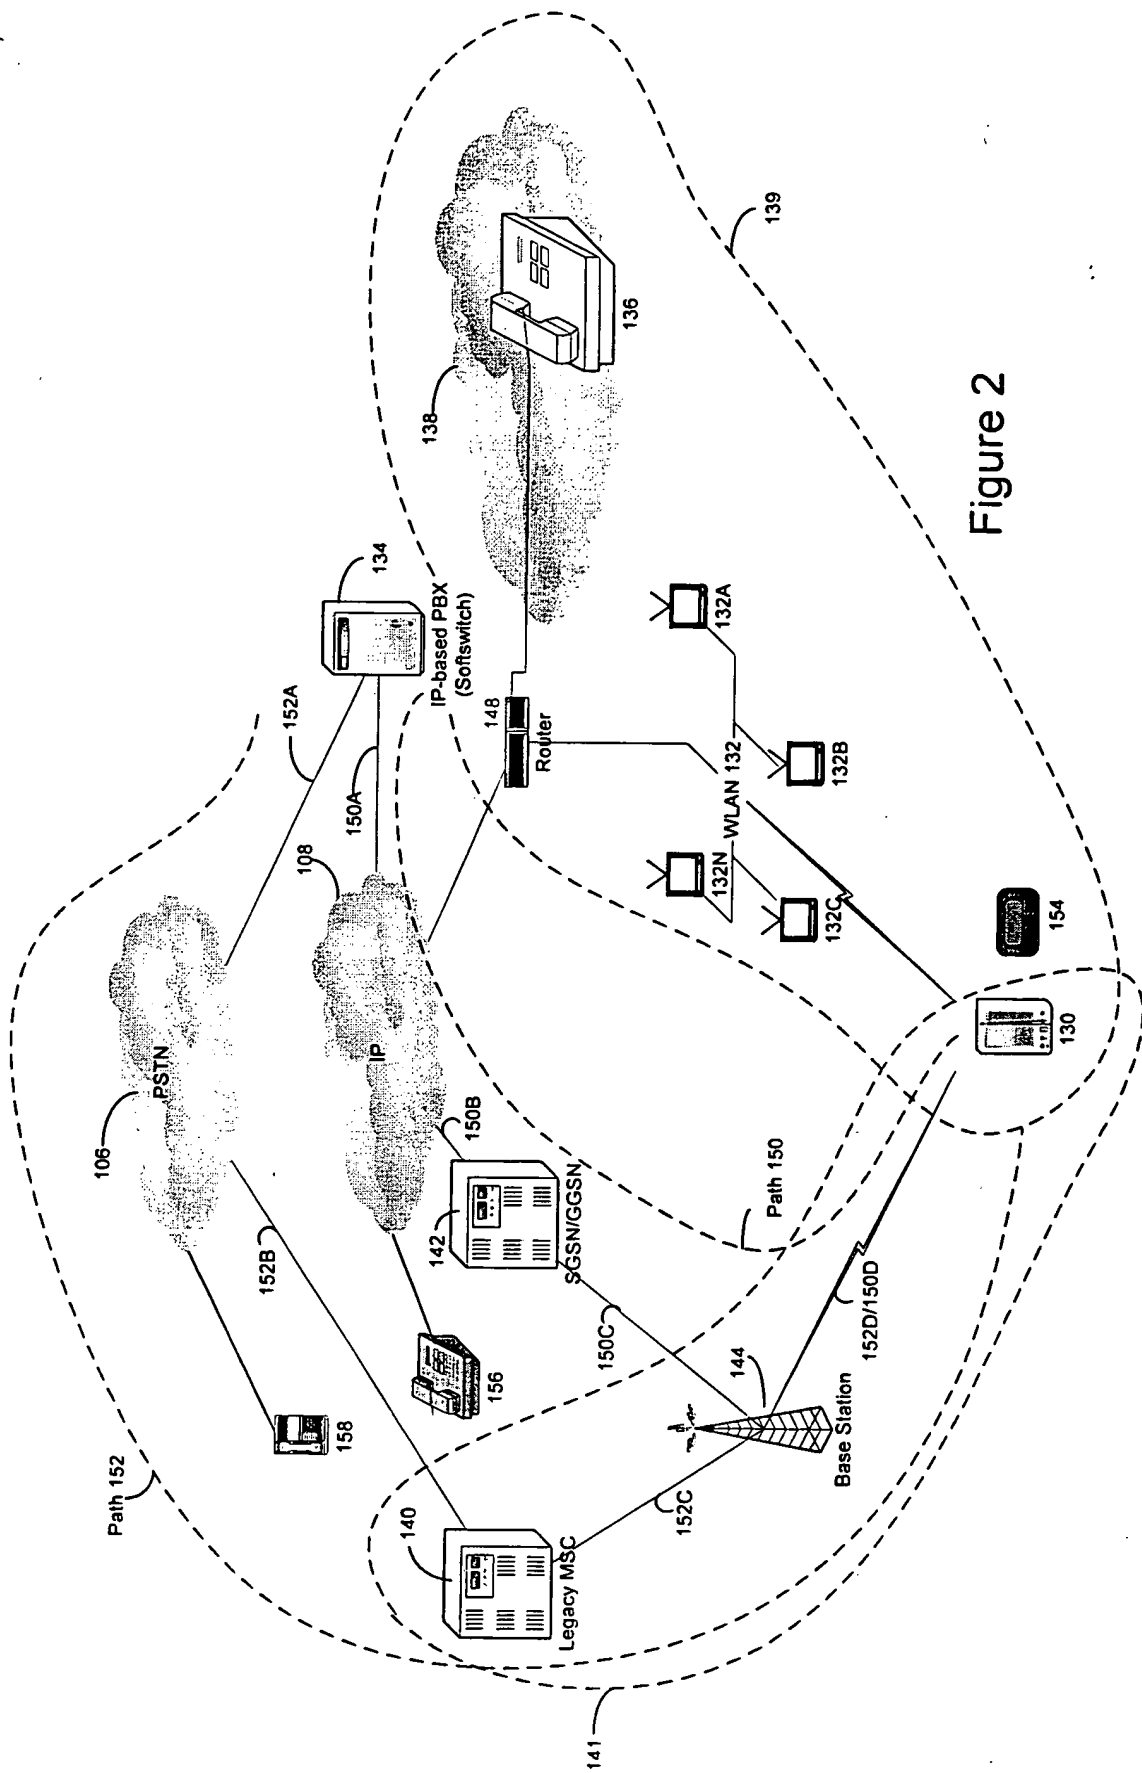


Figure 2

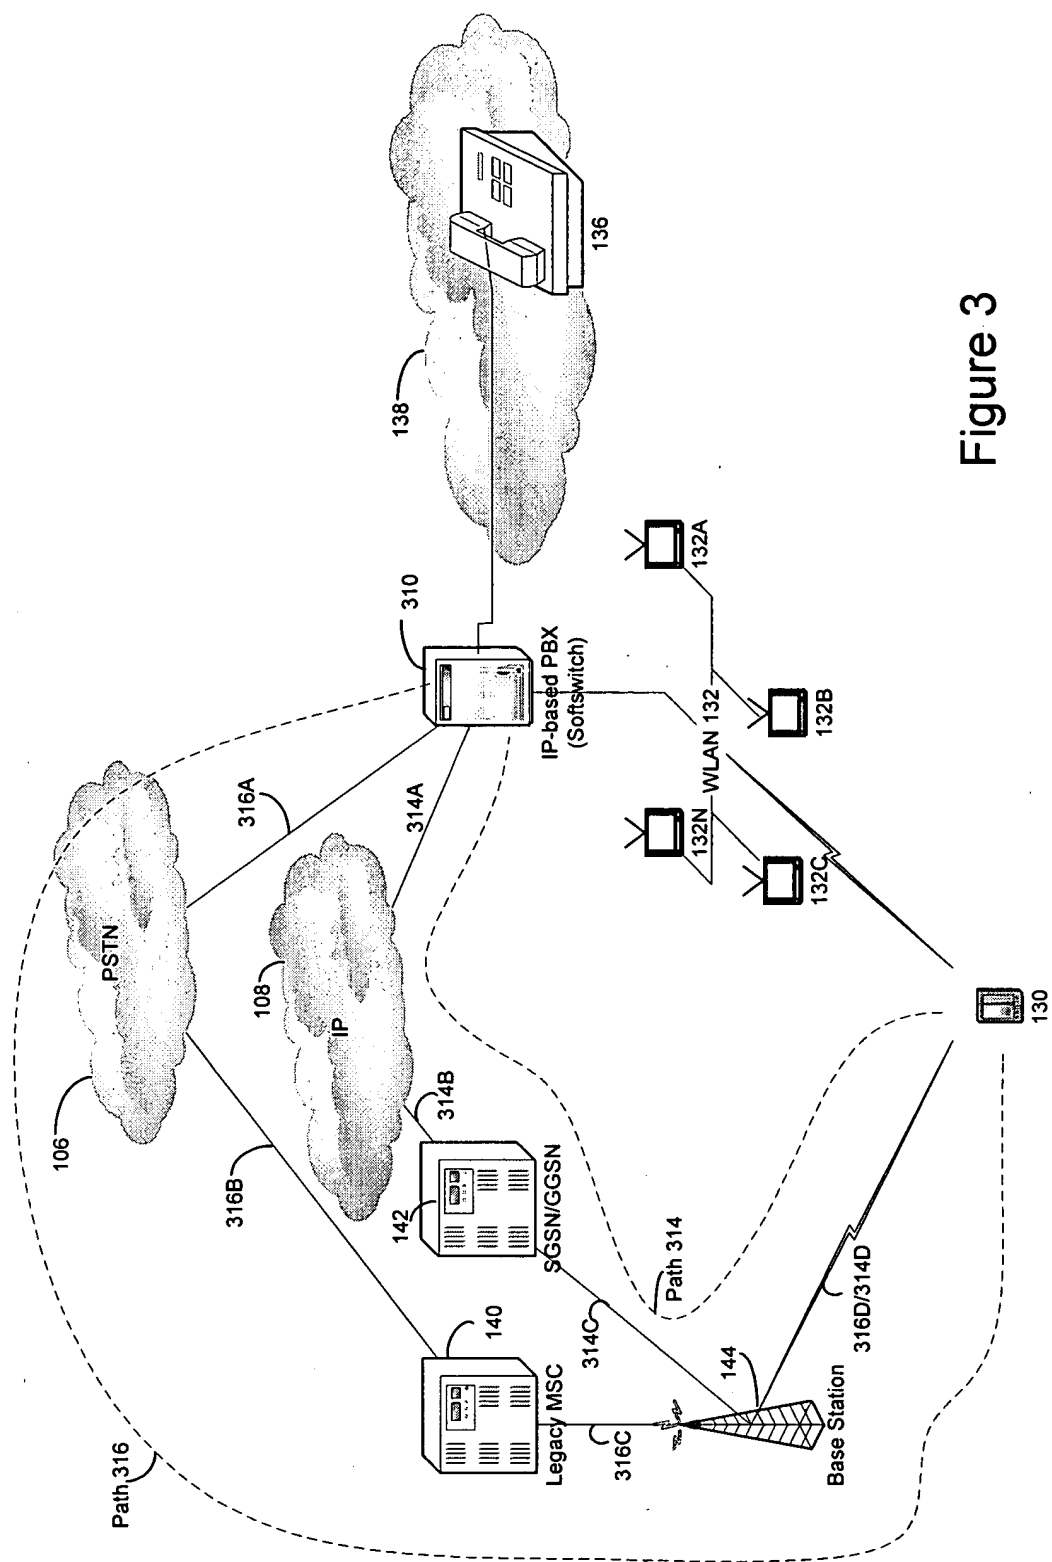


Figure 3

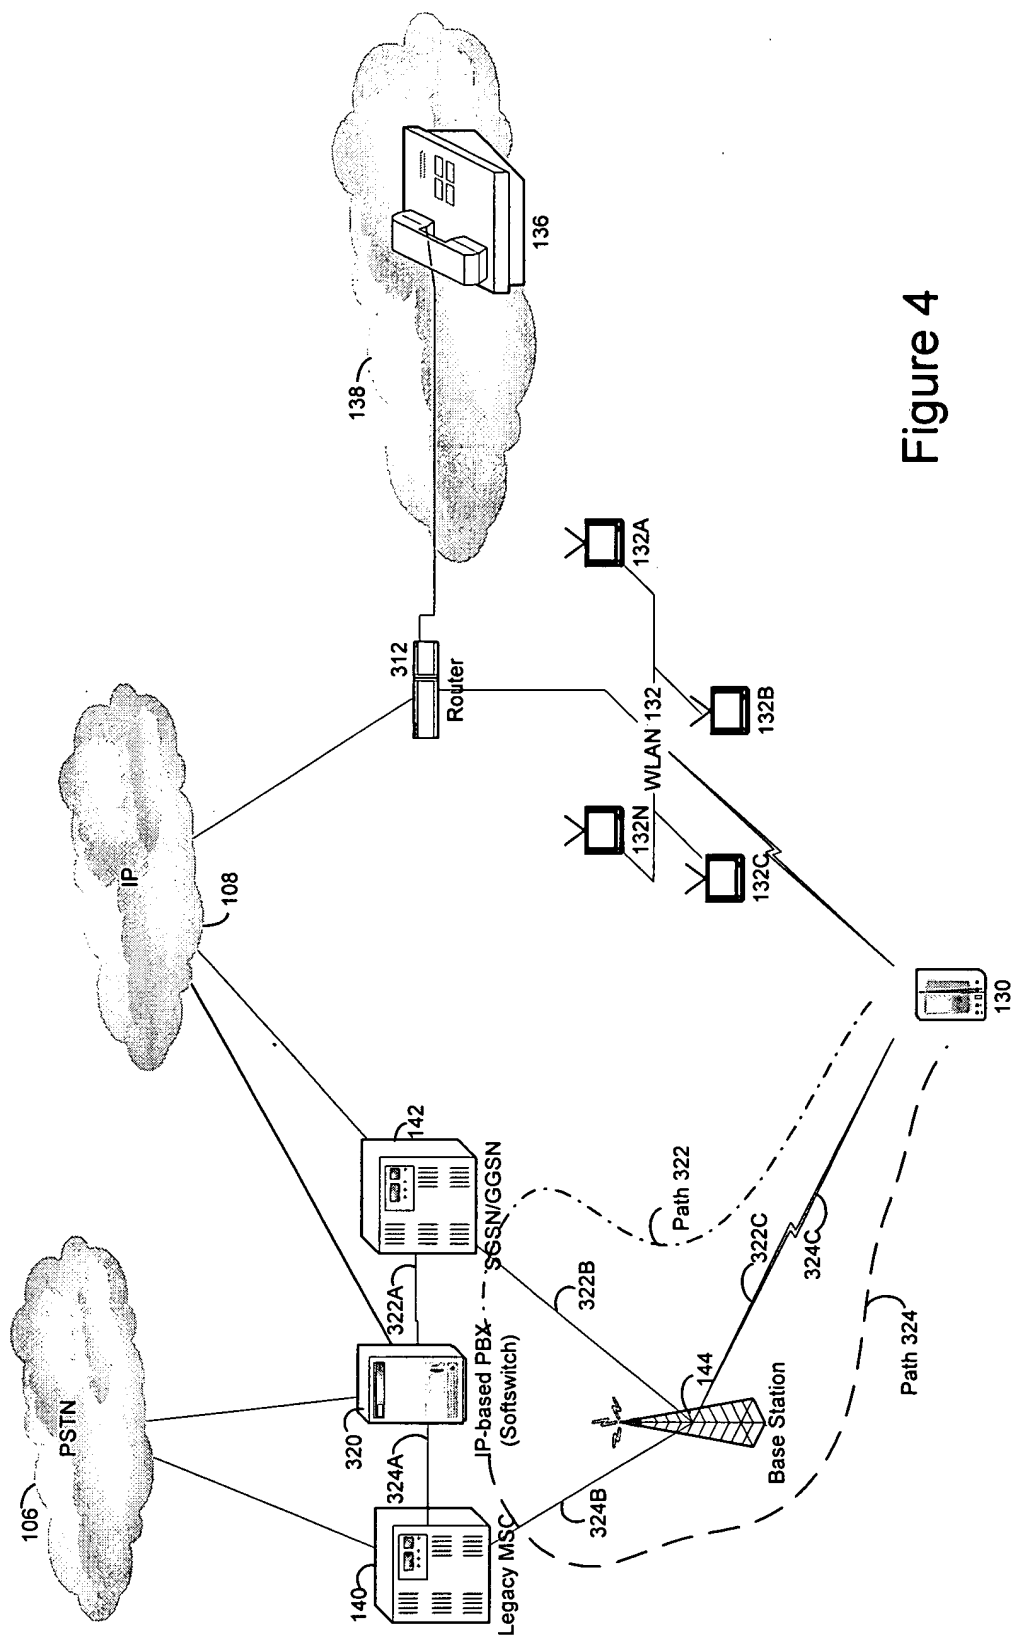


Figure 4

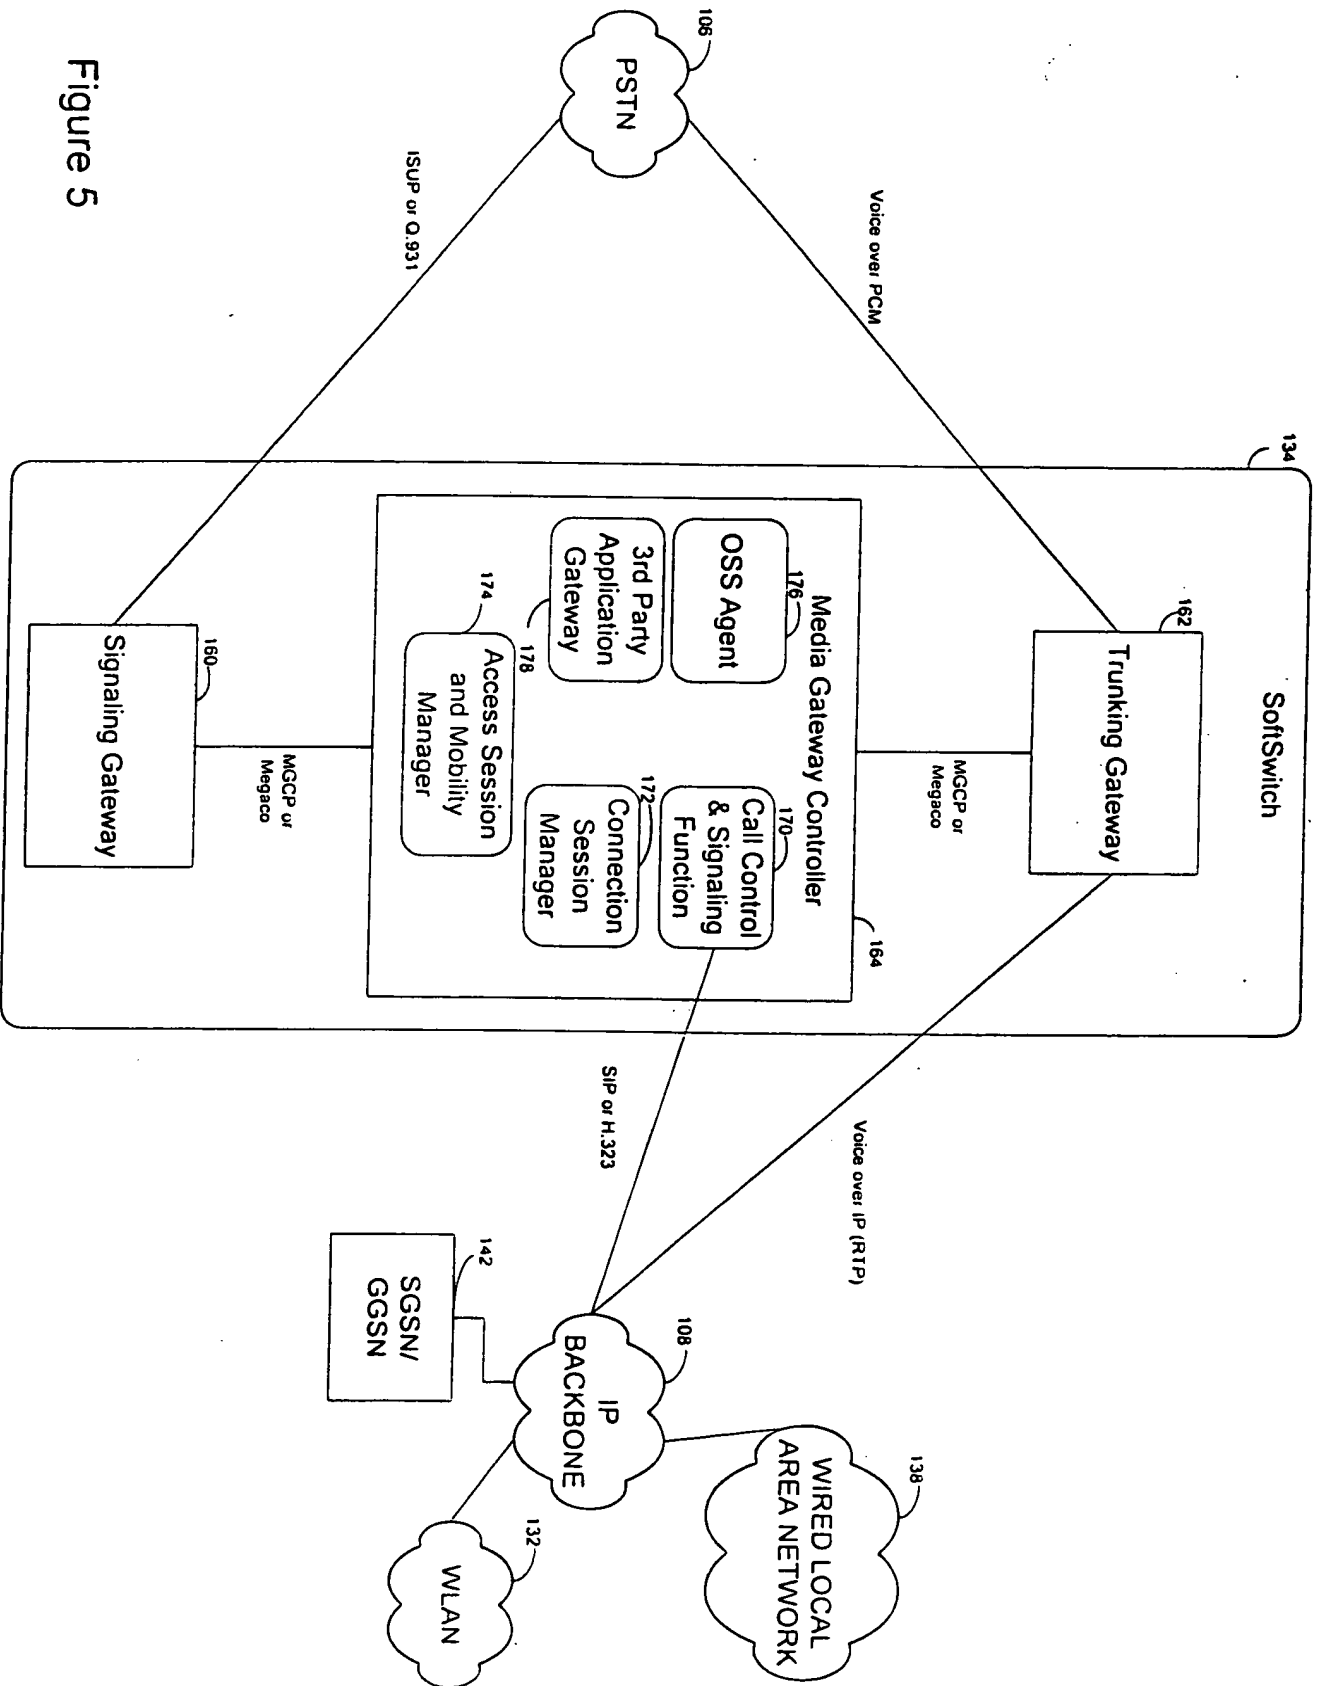


Figure 5

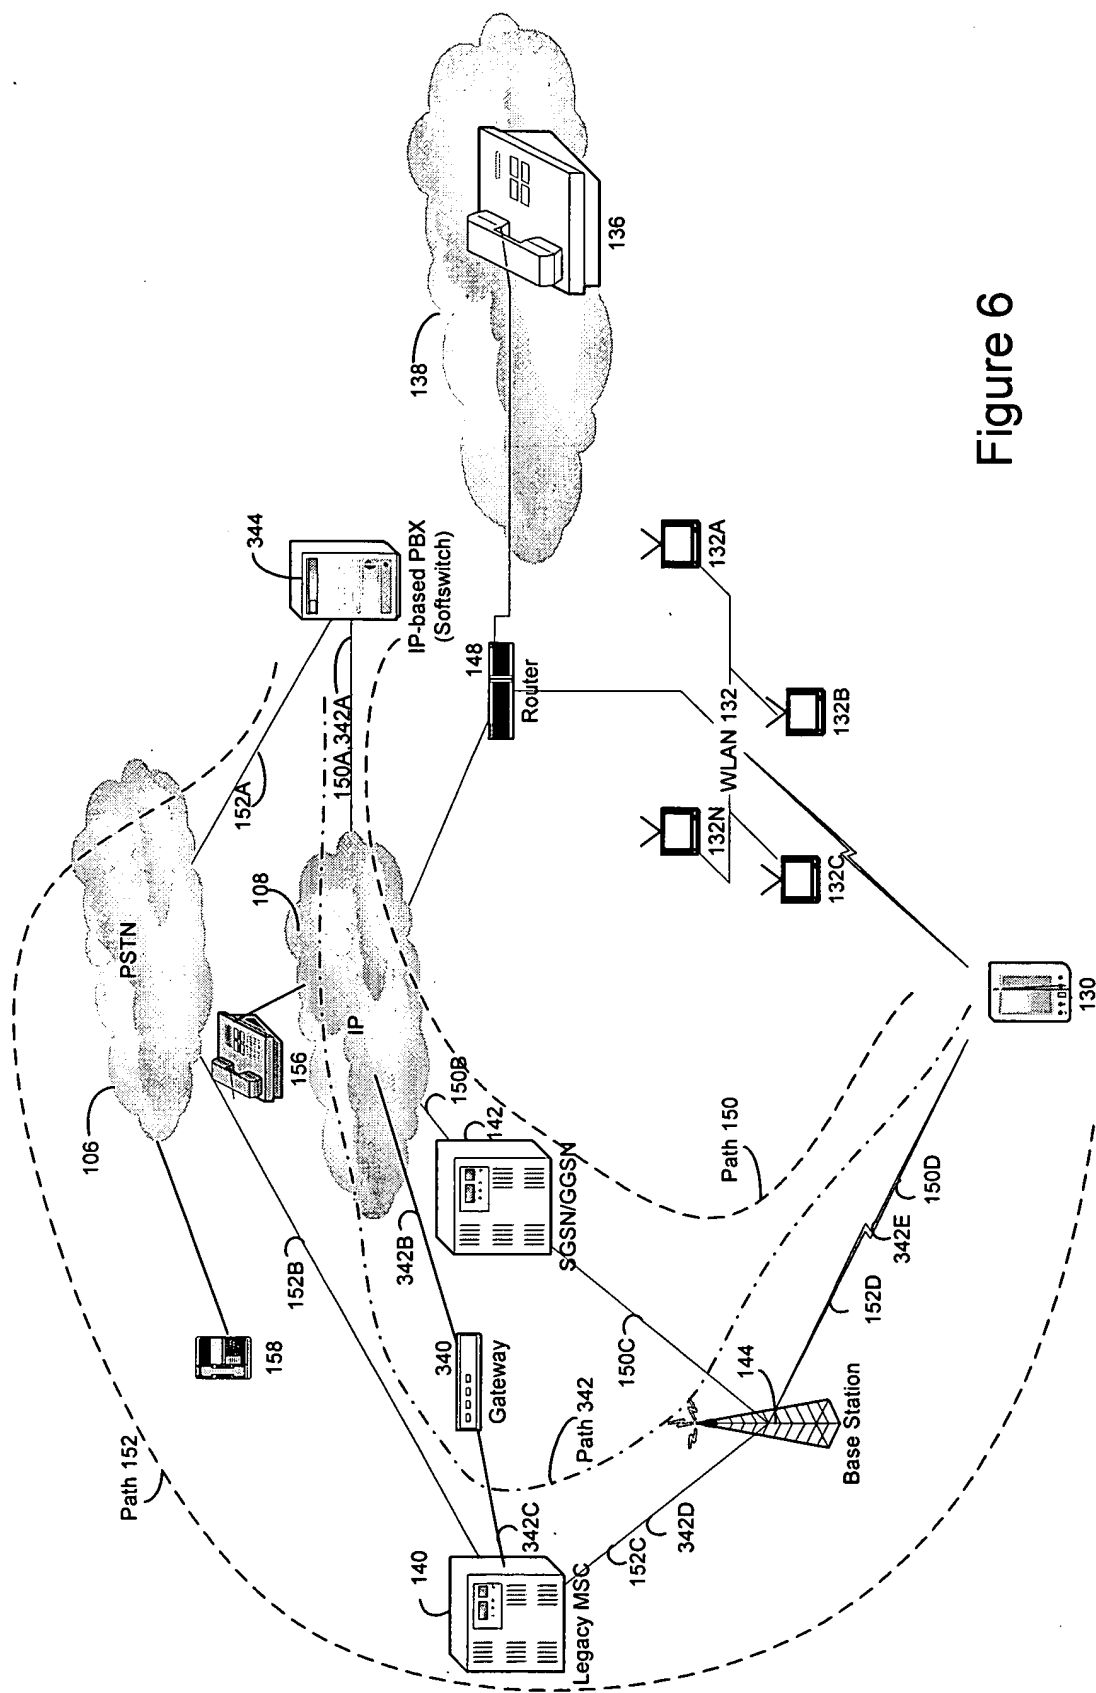


Figure 6

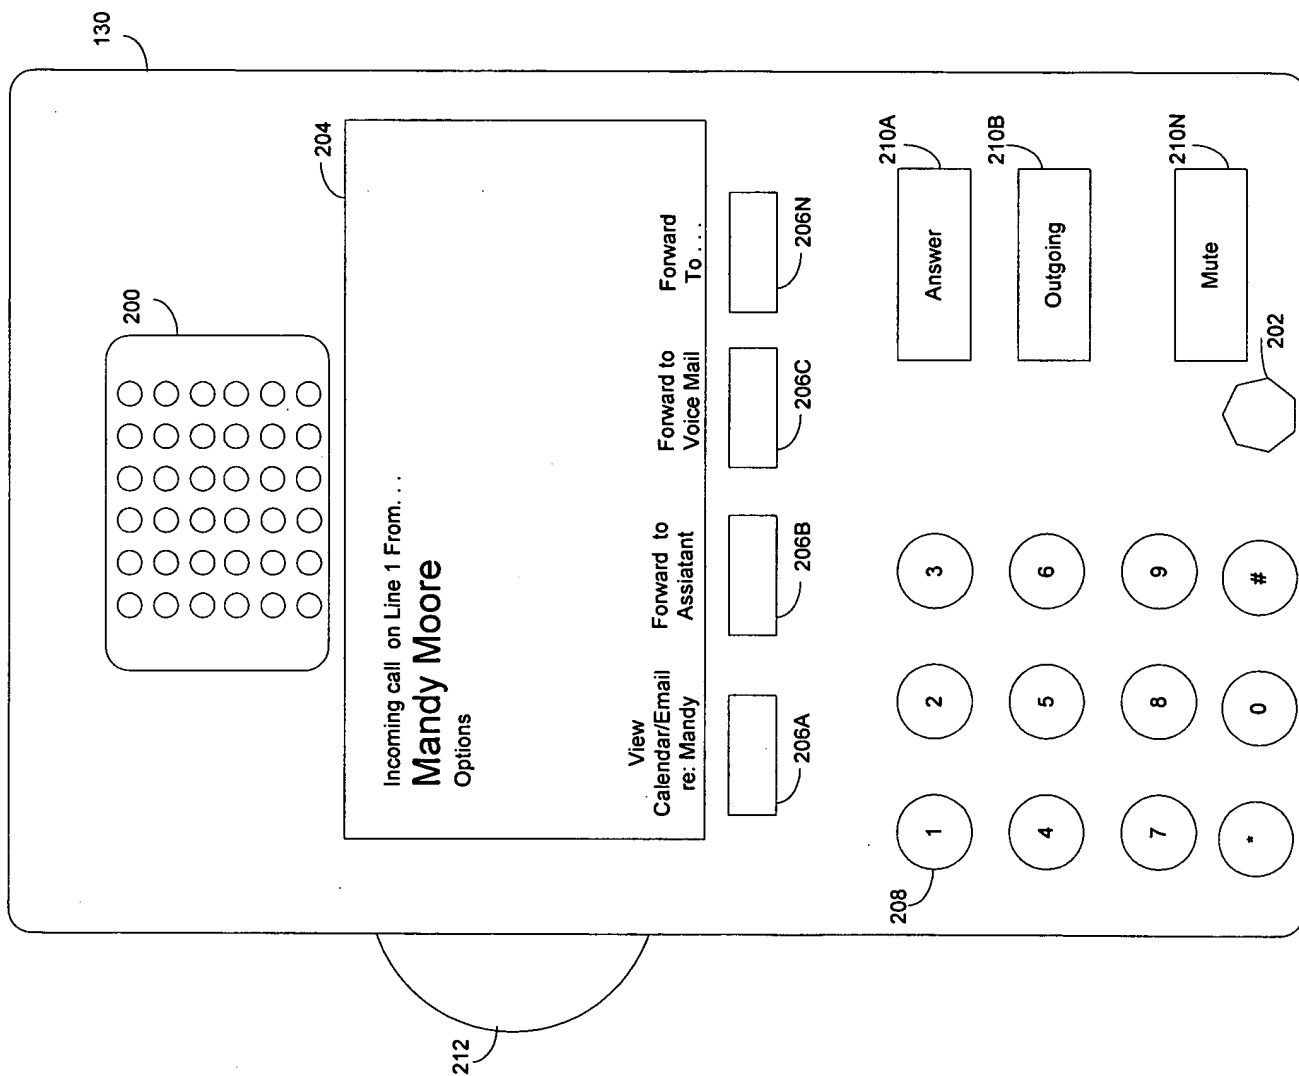


Figure 7

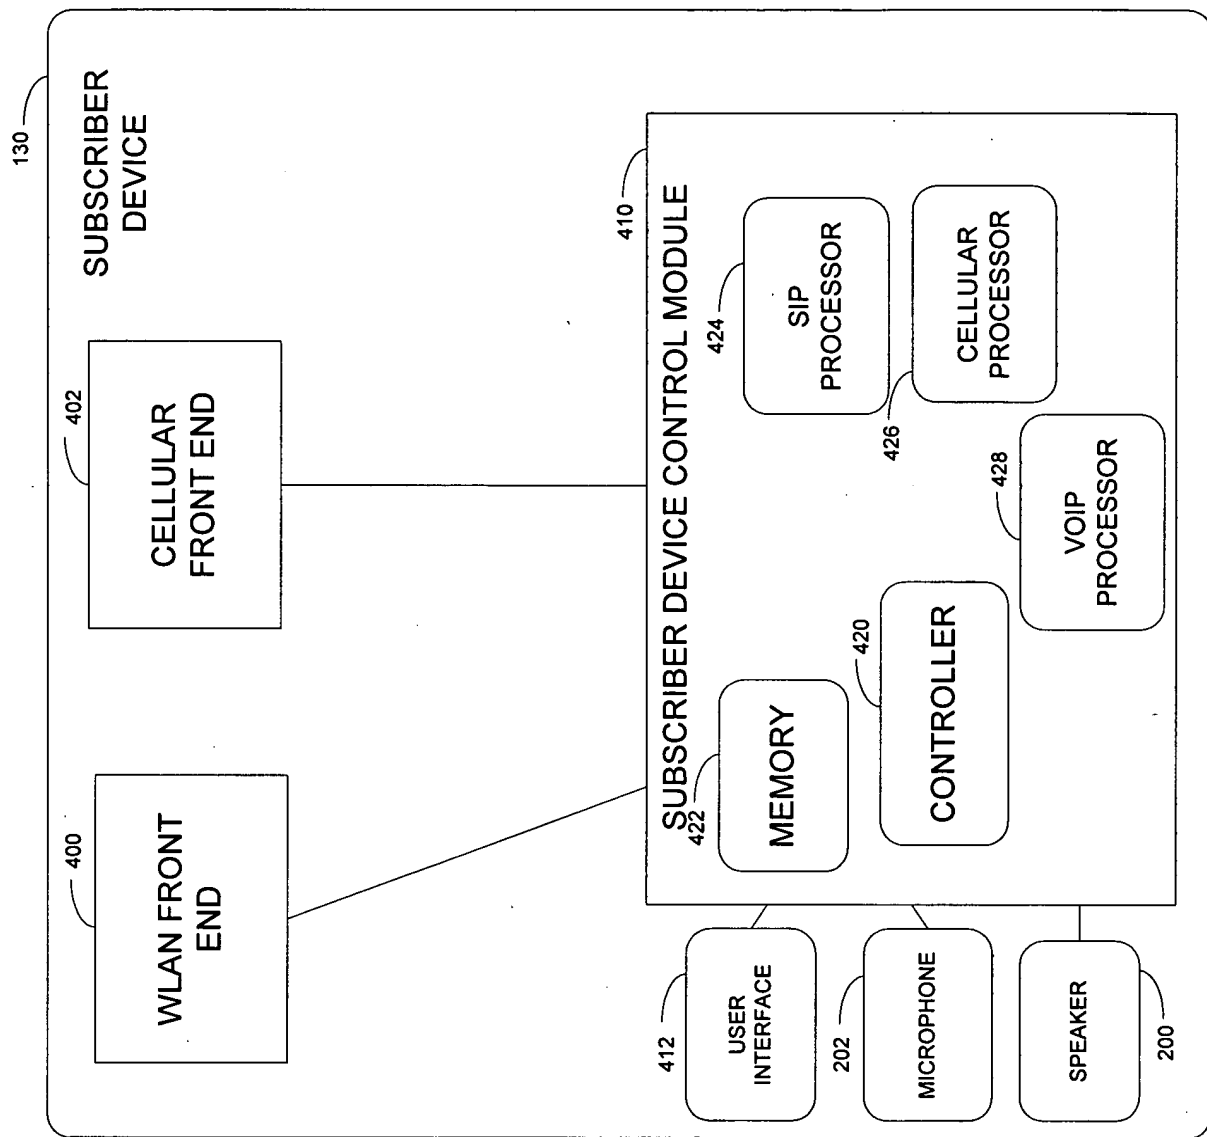


Figure 8

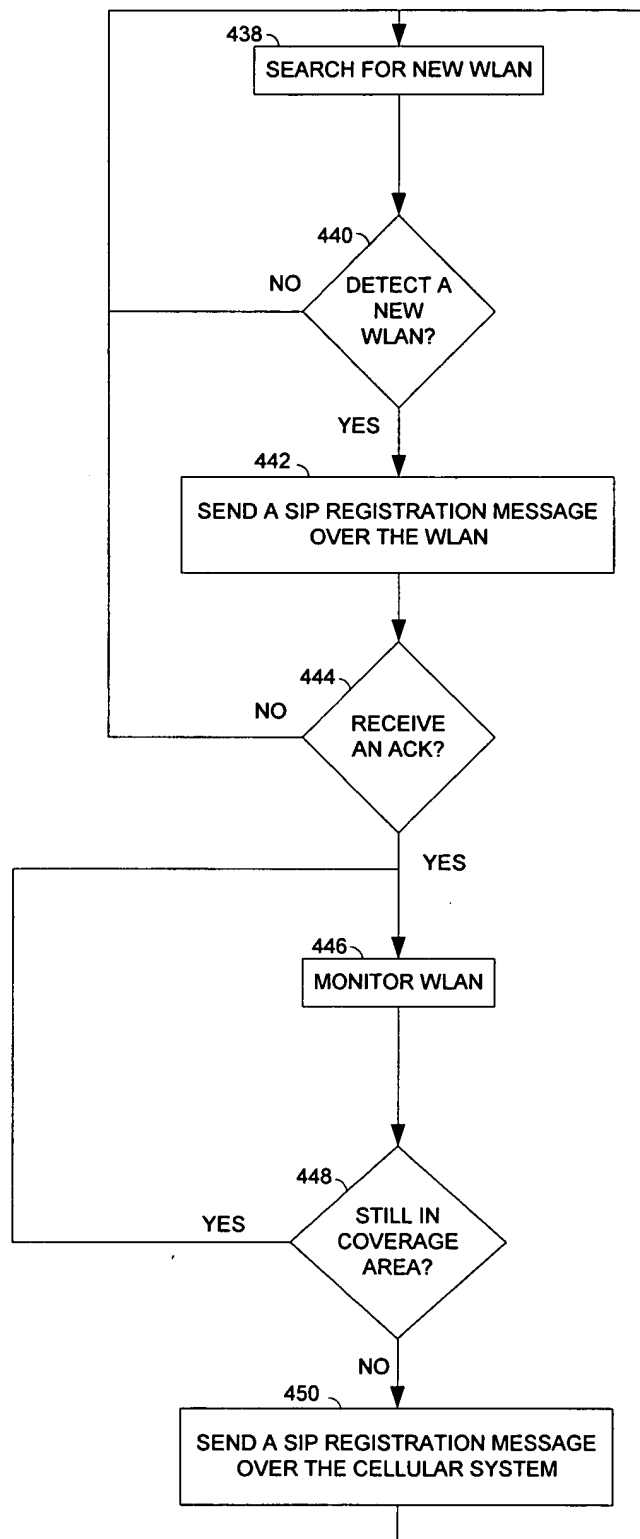


Figure 9

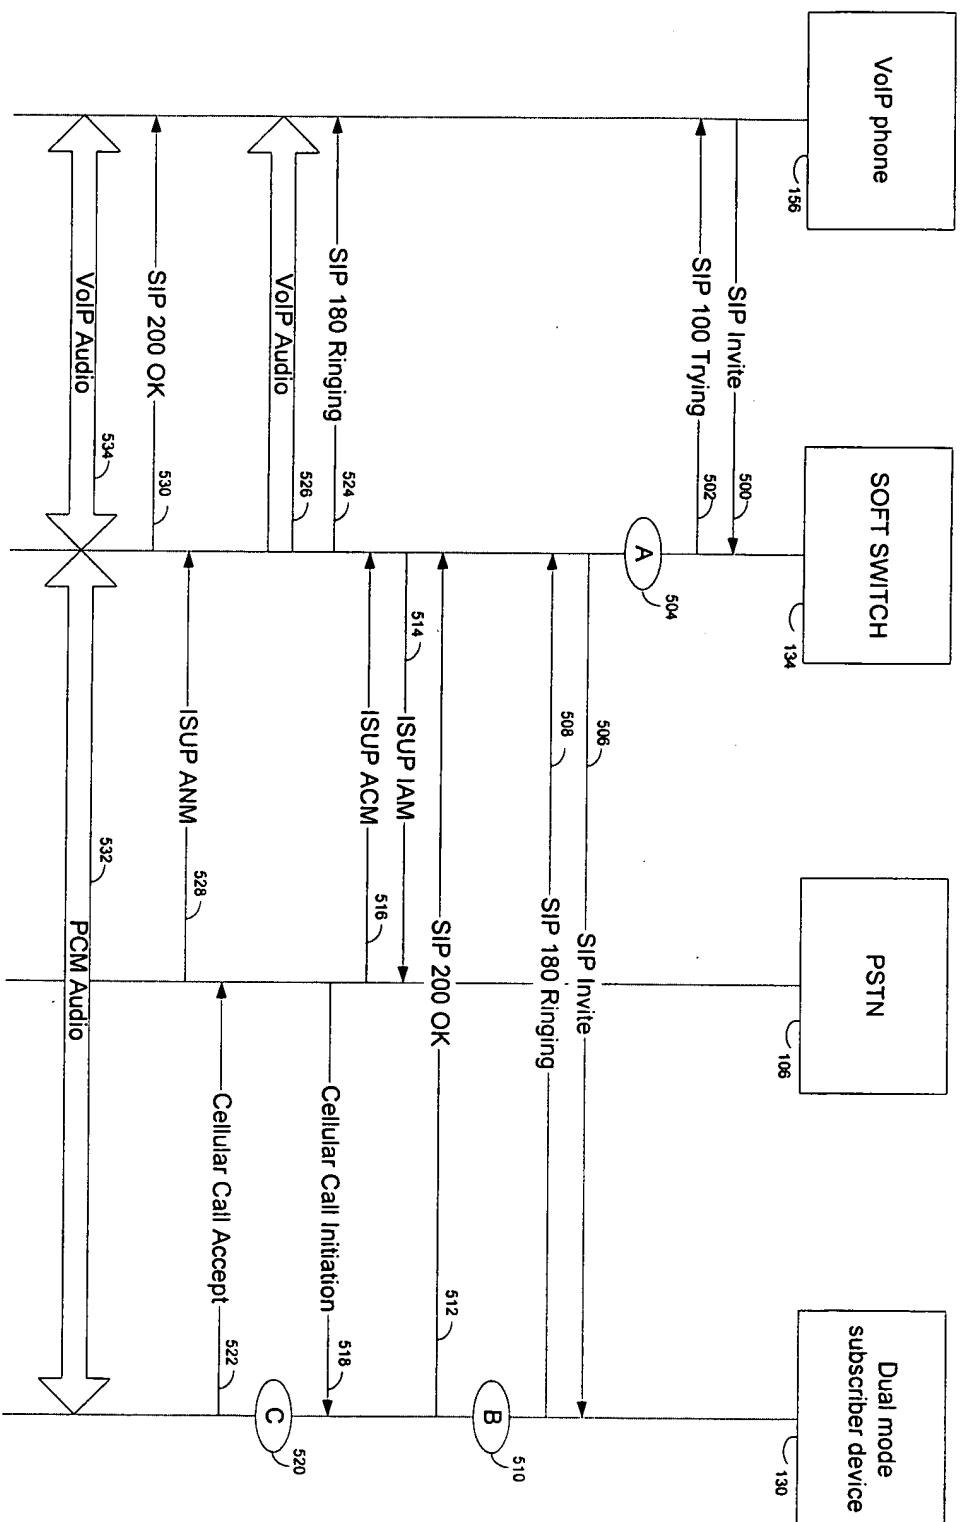


Figure 10

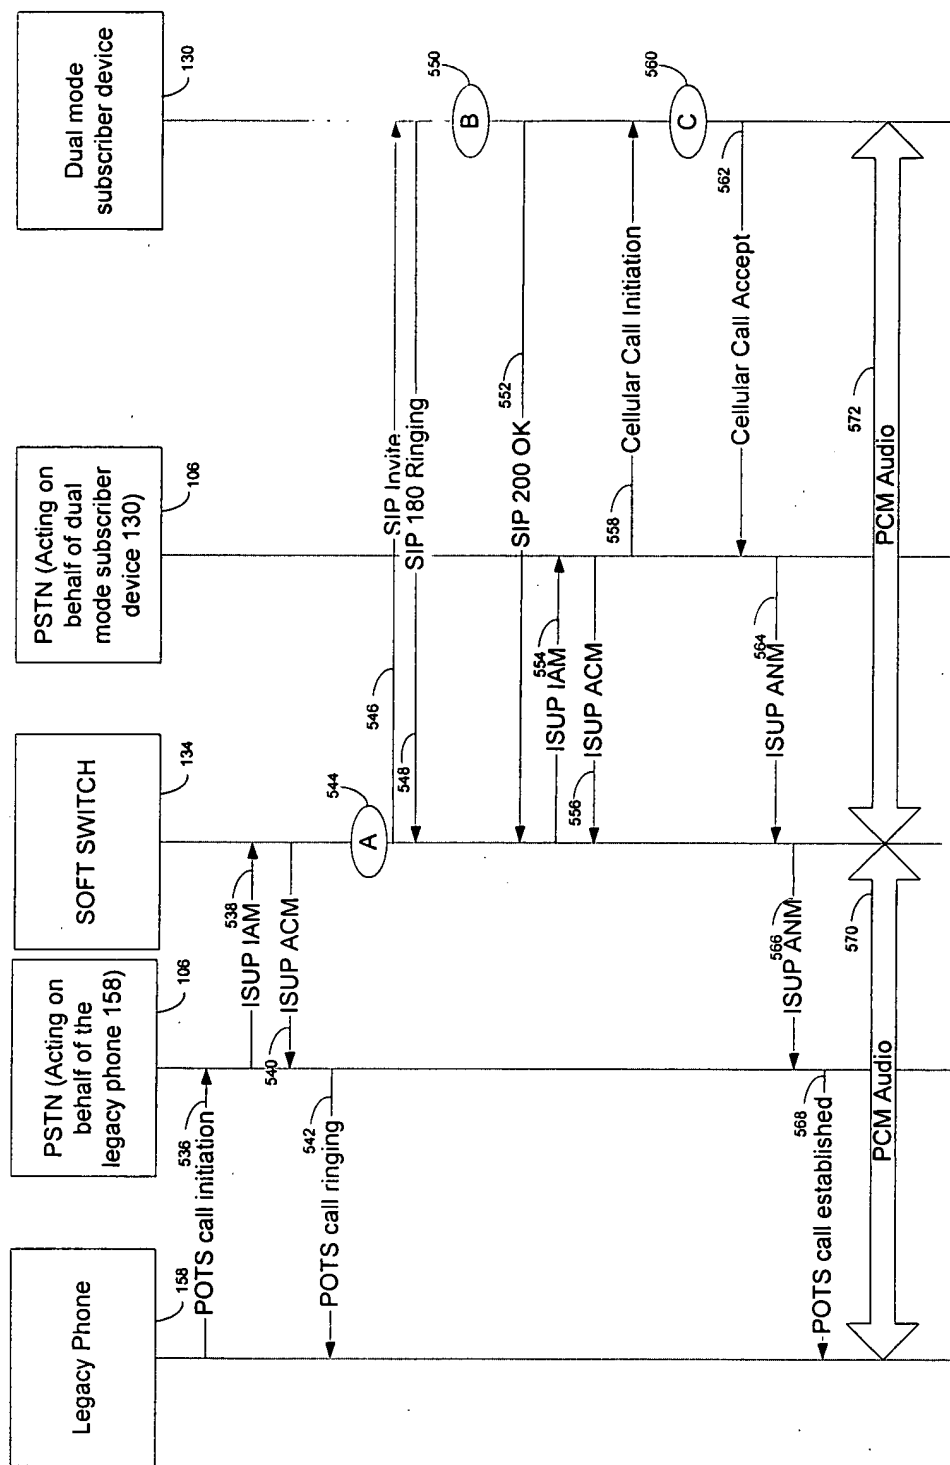


Figure 11

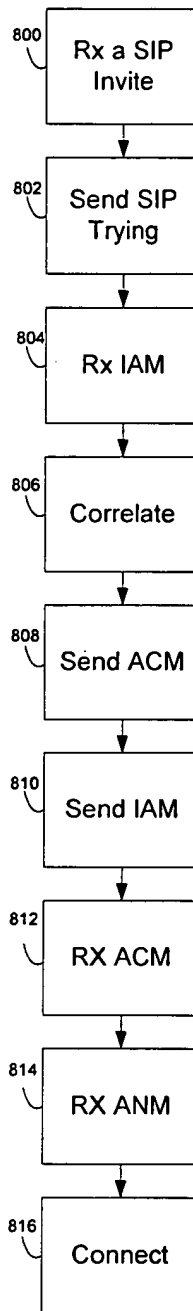


Figure 12

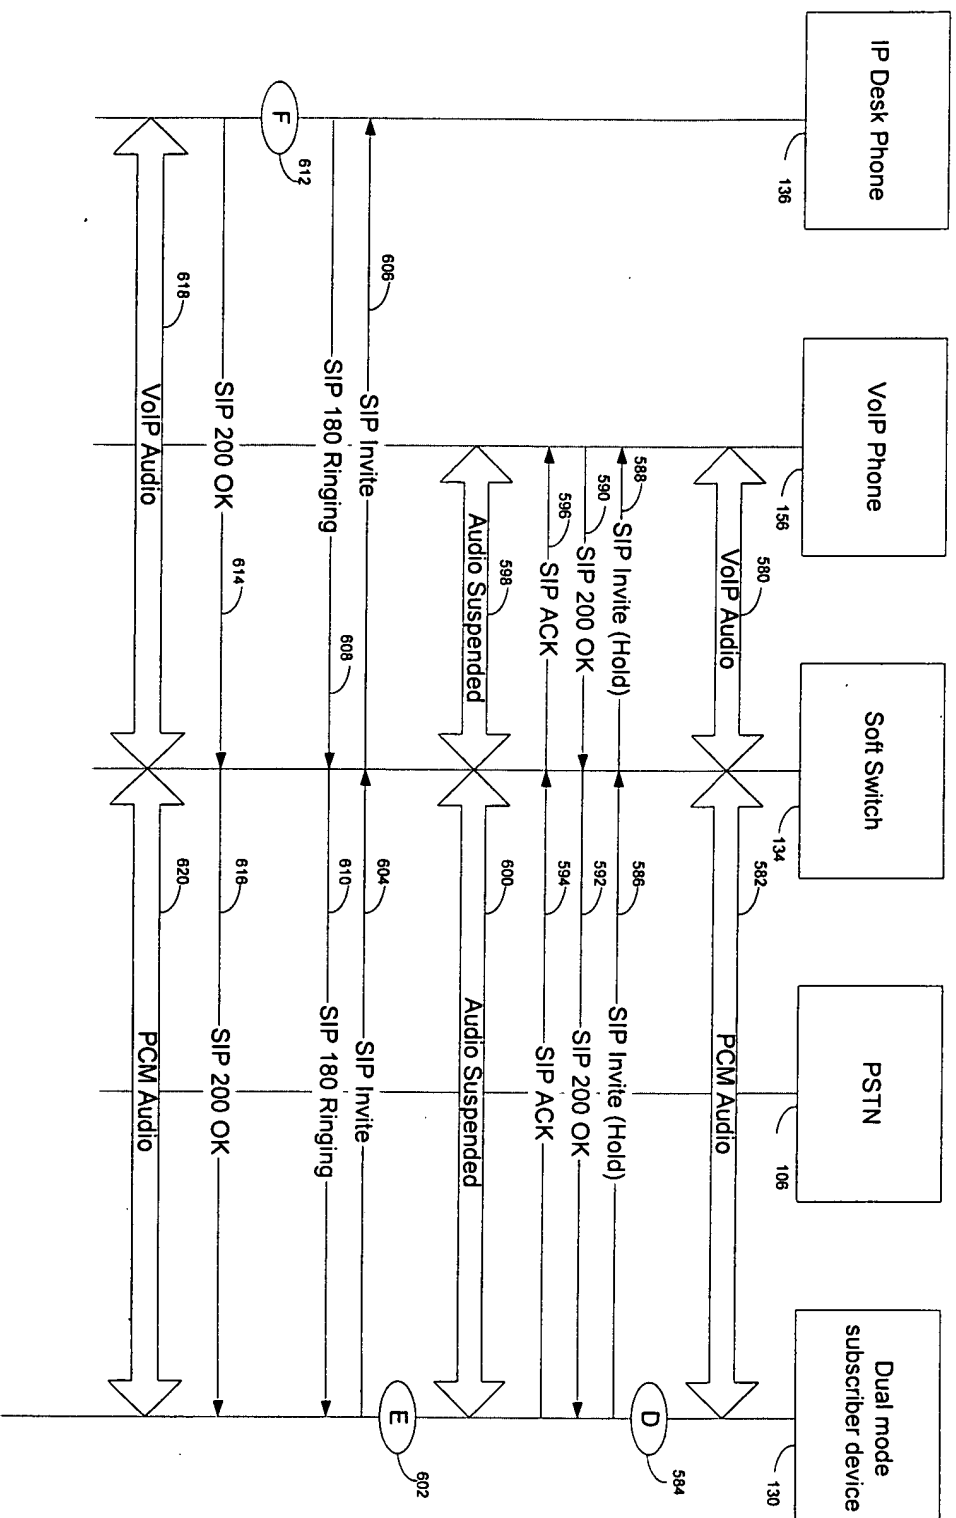


Figure 13A

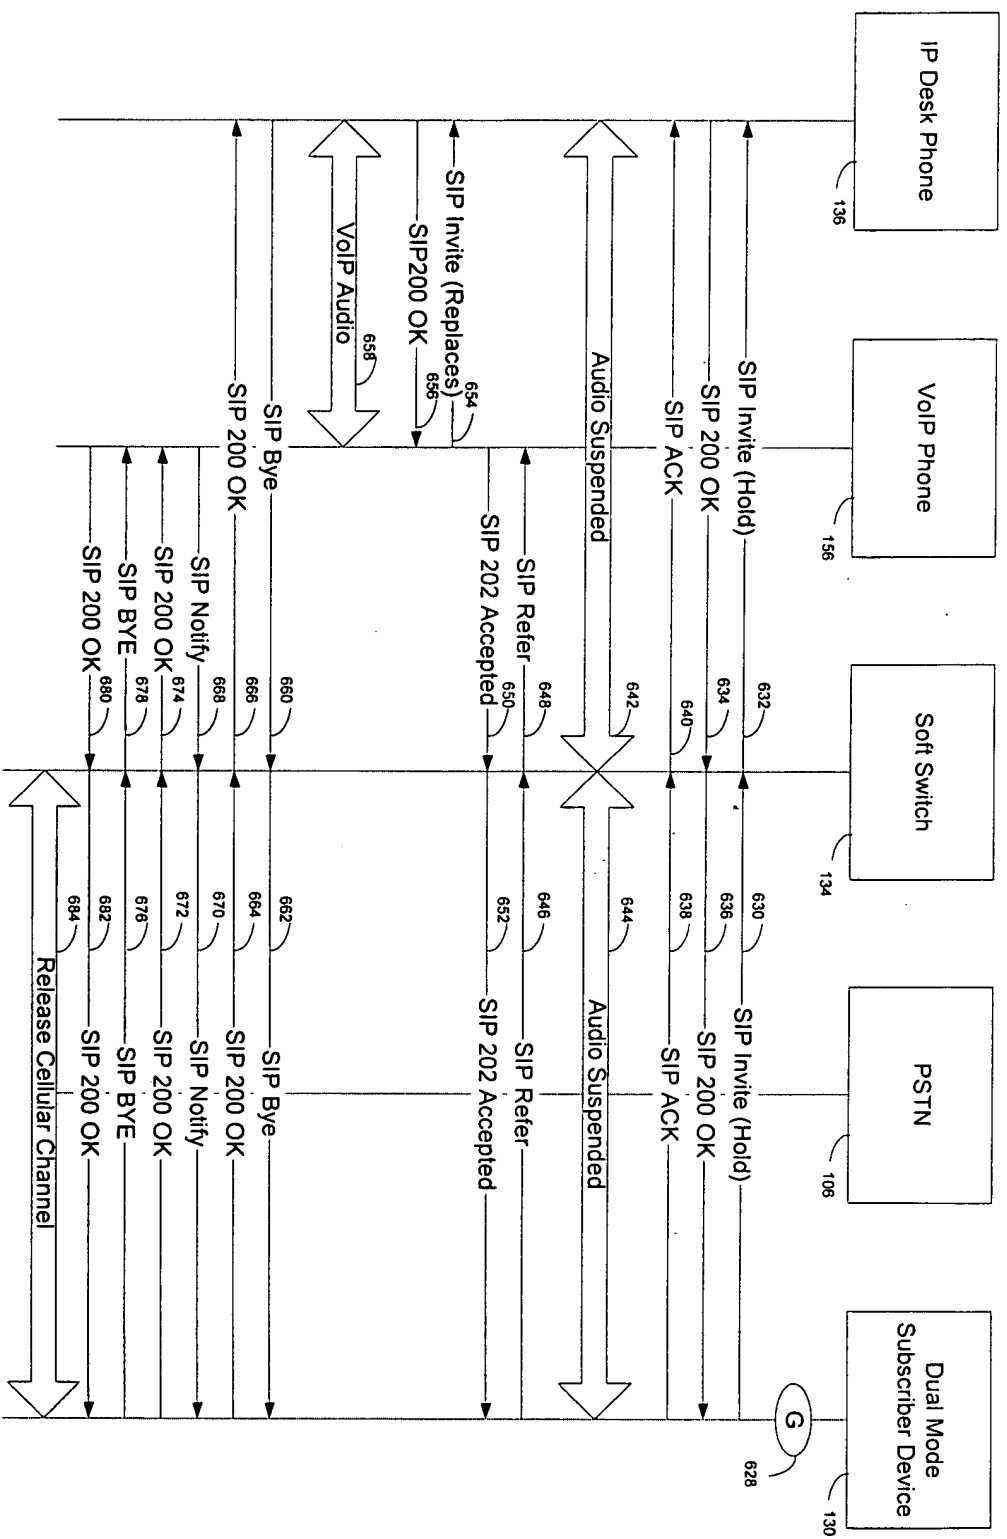


Figure 13B

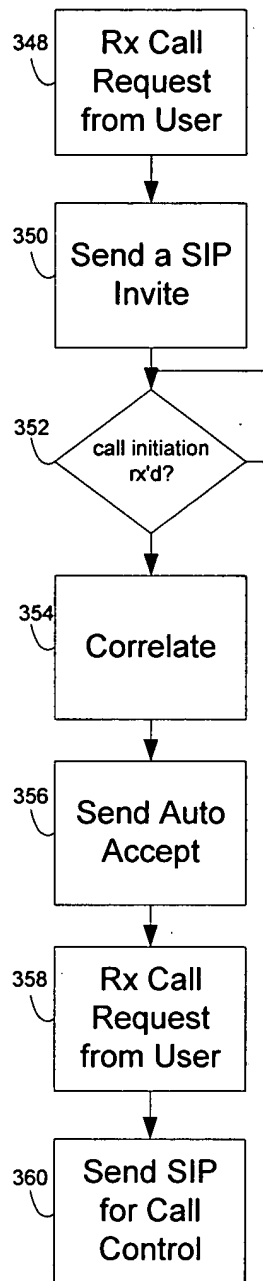


Figure 16

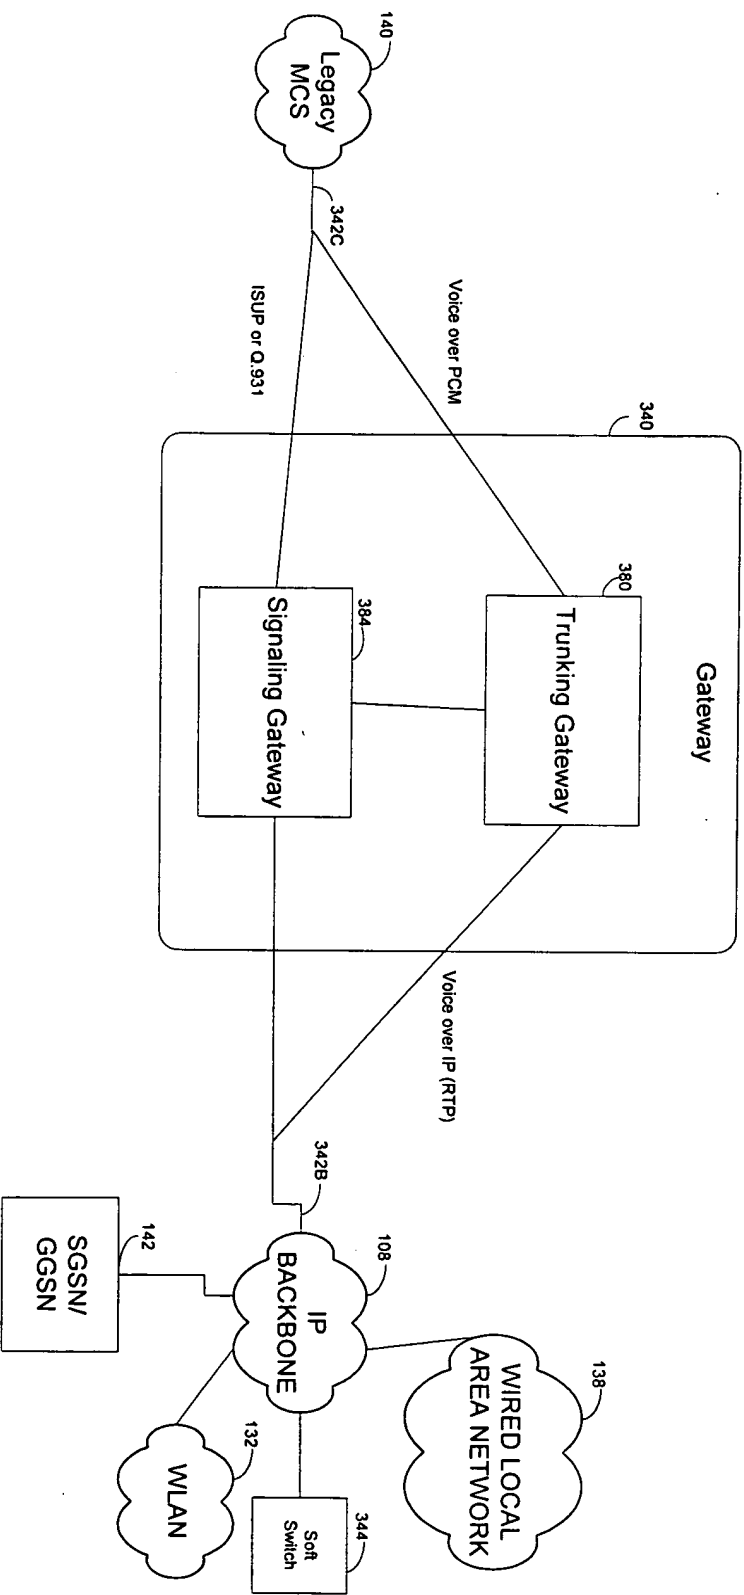


Figure 17


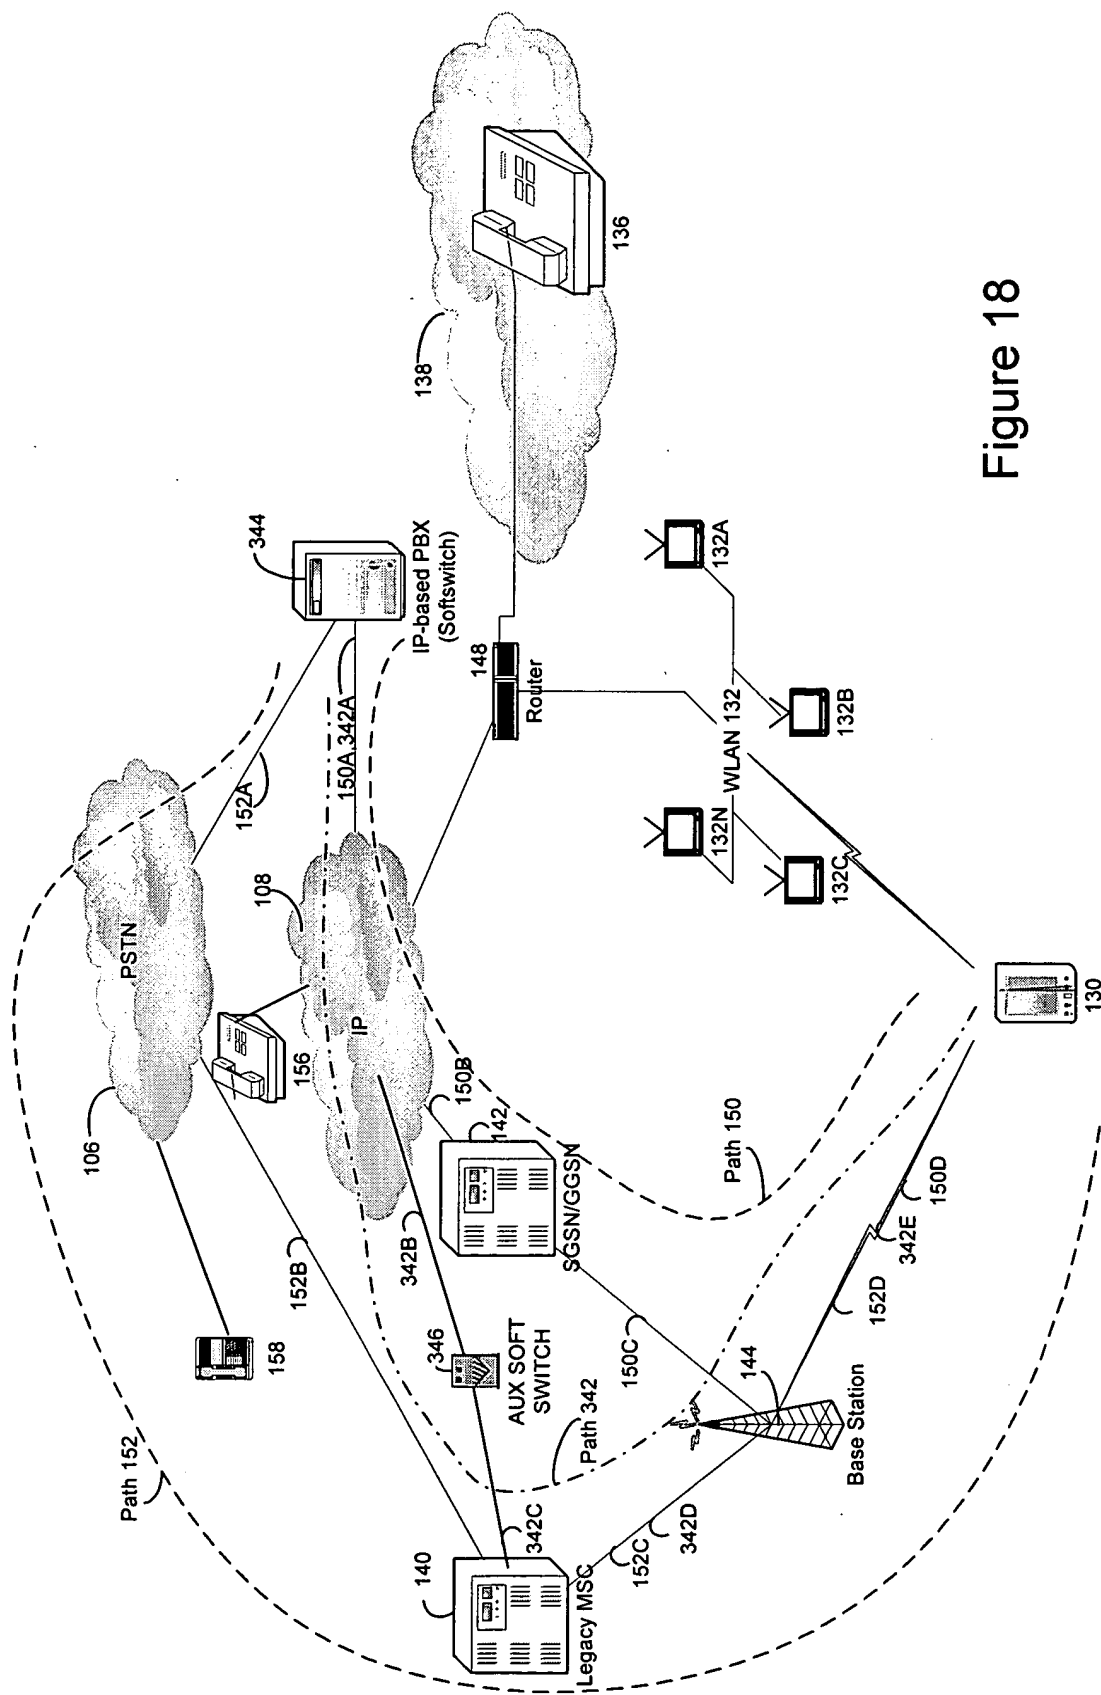


Figure 18

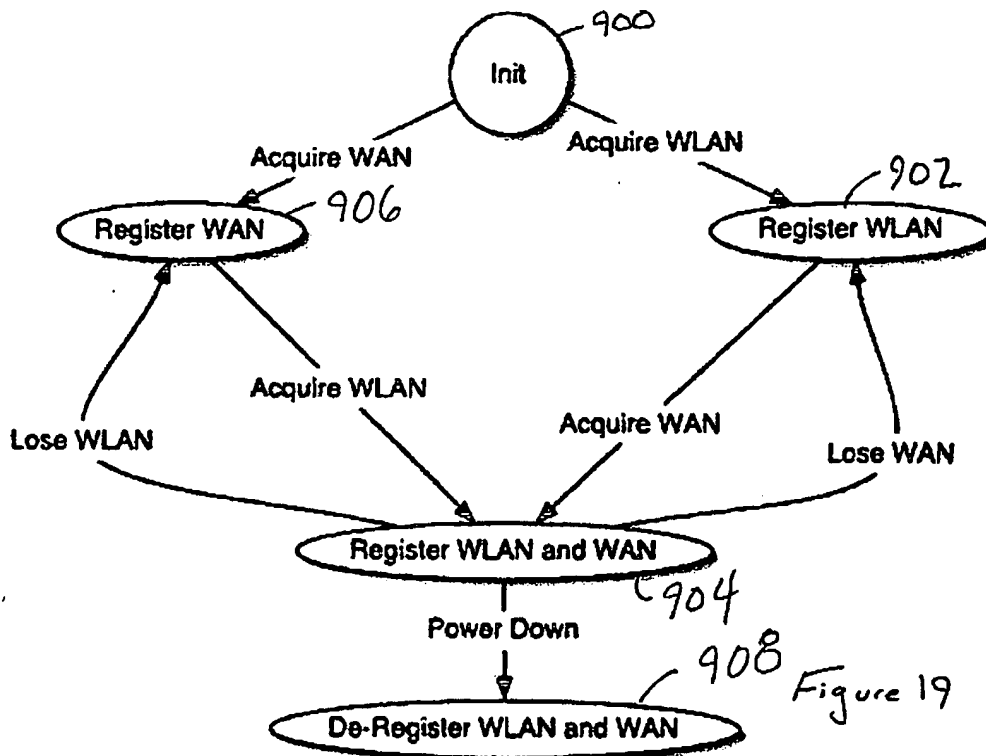

Register WAN
Home or Roaming WAN SIP Registration or Registration Update.
Register phone number.
Q parameter of Contact Header set to 0.1 to indicate lower priority for WAN.

Register WLAN and WAN
Home or Roaming WAN and WLAN SIP Registration or Registration Update.
Register both IP address and phone number.
Q parameter of phone set to 0.1 to indicate lower priority for WAN.
Q parameter of IP address set to 0.9 to indicate higher priority of WLAN.

Register WLAN
Home or Roaming WLAN SIP Registration or Registration Update.
Register IP Address.
Q parameter of Contact Header set to 0.9 to indicate higher priority for WLAN.

Figure 19

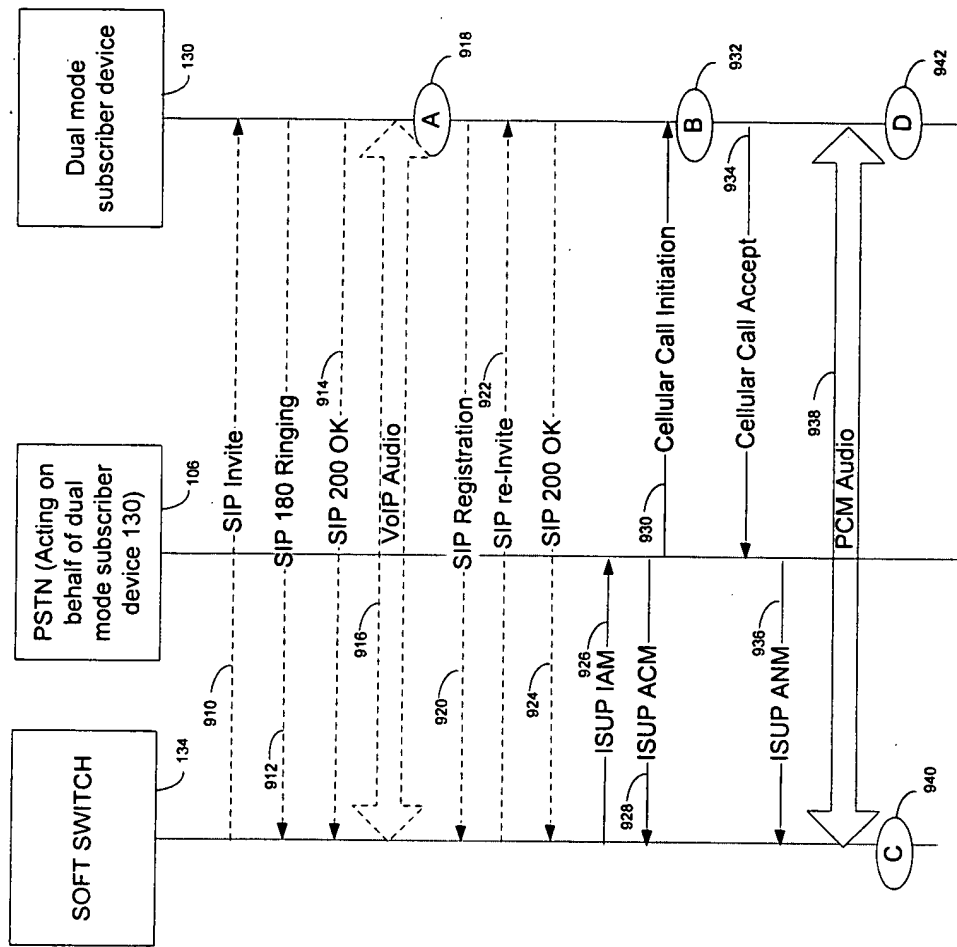


Figure 20

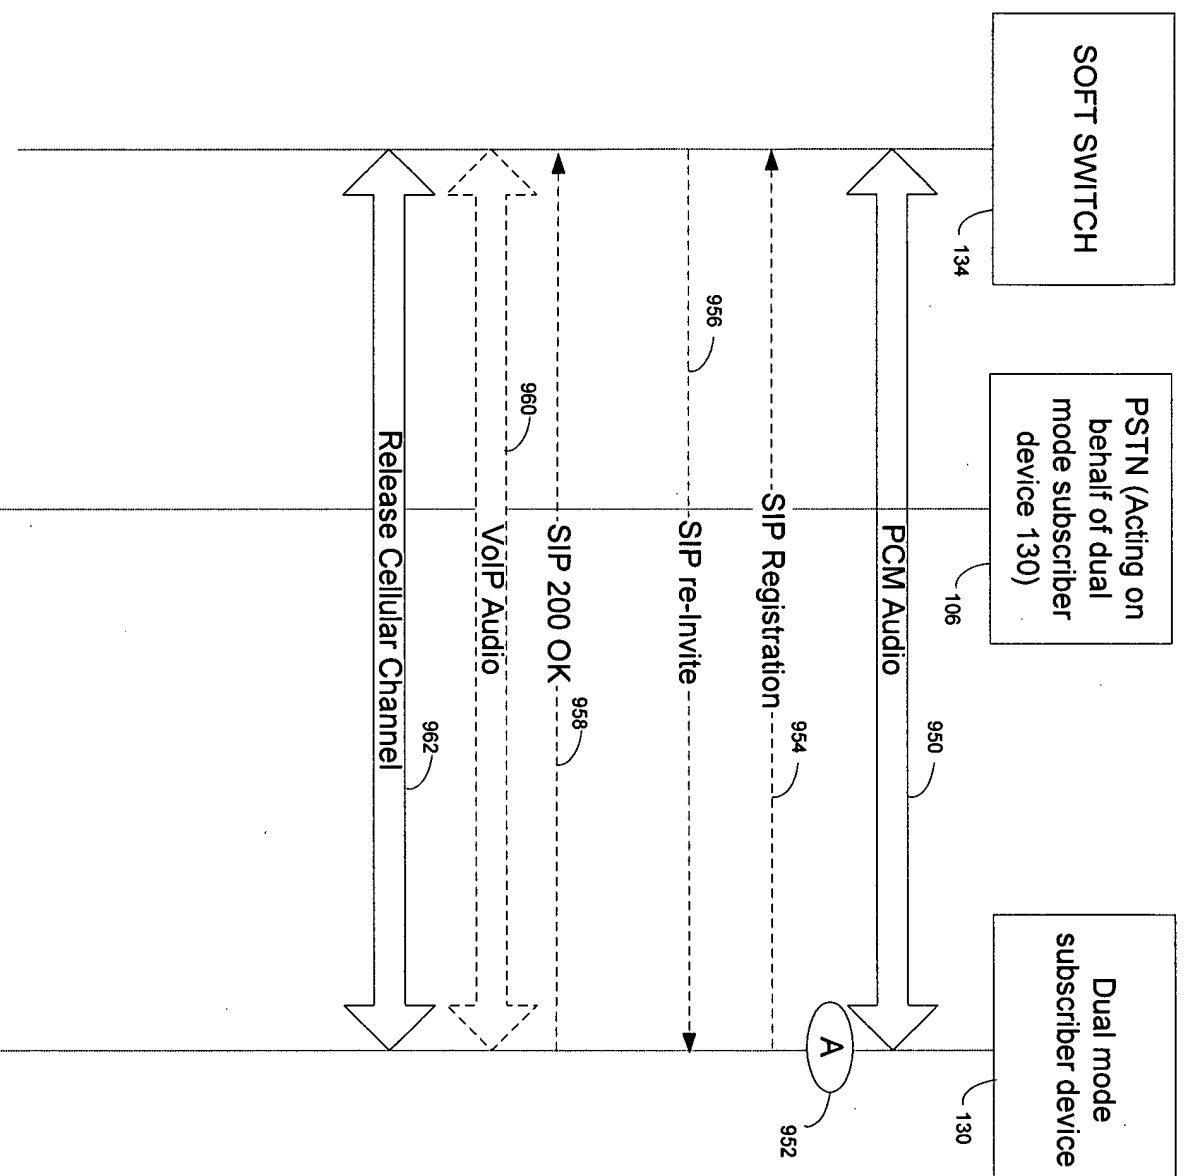


Figure 21

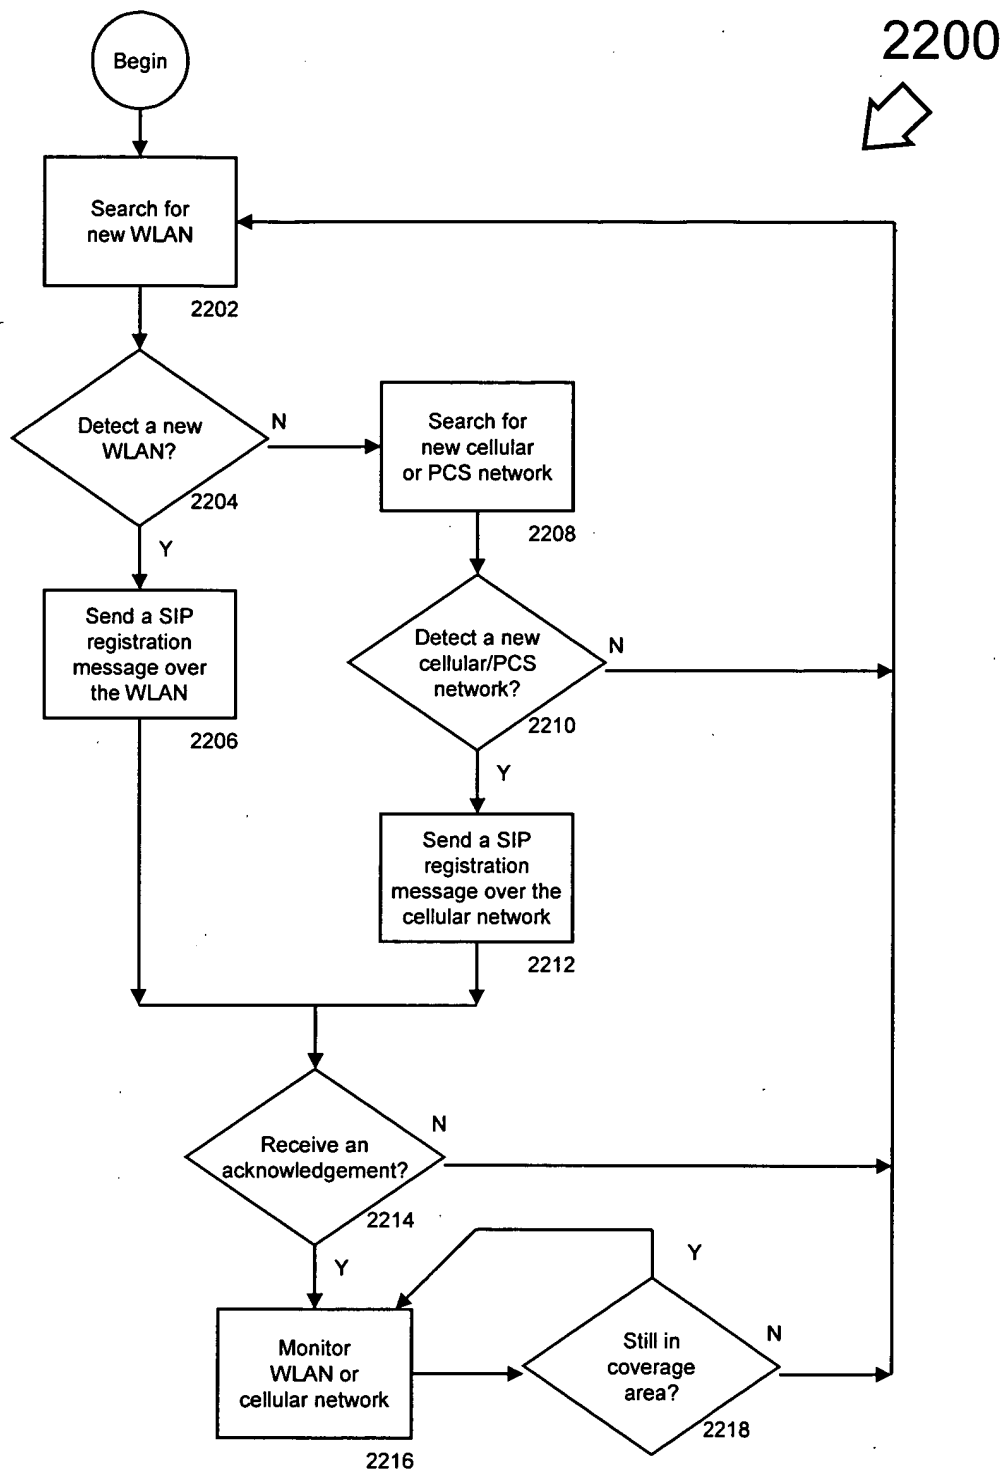


FIG. 22

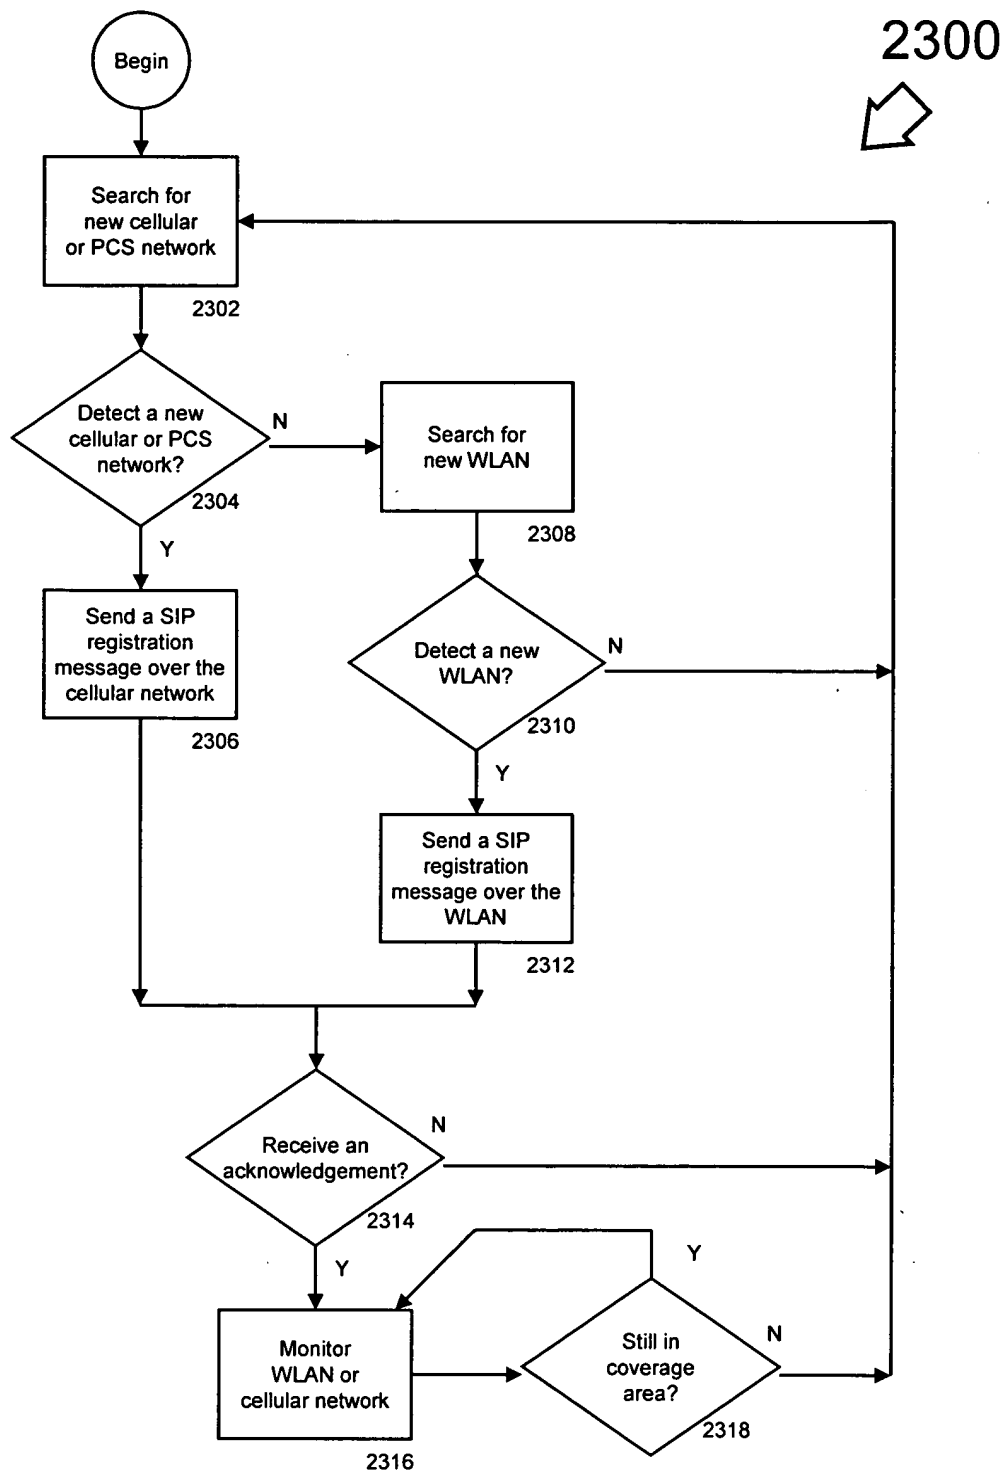


FIG. 23